



# ICE1806/1807 - Cube Ice Maker



ICE1806 on B100

### **Features**

- Produces up to 1,954 lbs (888 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- *Pure Ice*® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- · Space saving 26" (660 mm) tall design.

### **Options & Accessories**

Water Filters						
Ice Machine		Inline				
Model	System	System Replacement				
ICE1806	IFQ2	IOMQ (2)	N/A			
ICE1807	IFQ2	IOMQ (2)	N/A			

### | Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years Parts and Labor.
- $\boldsymbol{\cdot}$  Five years  $\boldsymbol{Parts}$  coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

### Ice Form



Full Cube						
W x D x H (in)	7/8 x 7/8 x 7/8					
W x D x H (mm)	22 x 22 x 22					
Half C	ube					
Half C	ube % x % x %					

### Bin Chart

Kits for Combining Wider Bins with Smaller Models

		lce Storage Bins								
	Model No. Capacity Width	<b>B25</b> 255 lbs (116 kg) 30 in (762 mm).	<b>B40</b> 365 lbs (165 kg) 30 in (762 mm)	<b>B42</b> 374 lbs (170 kg) 22in (559 mm)	<b>B55</b> 556 lbs (252 kg) 30 in (762 mm)	<b>B100</b> 927 lbs (420 kg) 48 in (1219 mm)	<b>B120</b> 1193 lbs (541 kg) 48 in (1219 mm)	<b>B150</b> 1499 lbs (679 kg) 60 in (1524 mm)	<b>B170</b> 1866 lbs (846 kg) 60 in (1524 mm)	
Kits	ICE1806	N/A	N/A	N/A	N/A	KIT NOT REQUIRED	KIT NOT REQUIRED	KIT NOT REQUIRED	KIT NOT REQUIRED	
Ķ	ICE1807	N/A	N/A	N/A	N/A	KIT NOT REQUIRED	KIT NOT REQUIRED	KIT NOT REQUIRED	KIT NOT REQUIRED	

<sup>\*</sup> See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.













11100 E. 45th Avenue Denver, CO 80239 Phone: 303. 371.3737 Fax: 303. 371.6296 www.iceomatic.com Rev: Part: A-05/08 1015


Enodis



# Cice-O-Matic

### Water Cooled/Remote

- A. Ice maker potable water in, 3/8" FPT.
- **B.** Ice maker water out, ¾" FPT.
- **C.** Hole for electrical connections, 7/8".
- **D.** Electrical Junction Box
- **E.** Condenser water in, 3/8" FPT.
- **F.** Condenser water out, ½" FPT.
- **G.** Liquid line, 3/8" male quick connect coupling for precharged line set (remote only).
- H. Discharge line, 1/2" male quick connect coupling for precharged line set (remote only).
- I. Hole for remote connections, 7/8" (remote only).

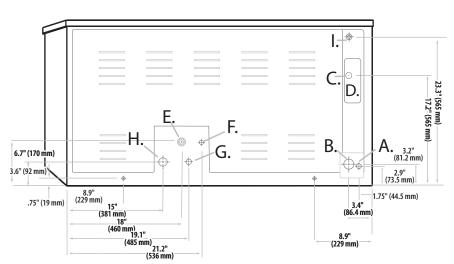

Water Cooled & Remote

# **Operating Requirements**

	Minimum	Maximum		
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)		
Water Temp.	40°F (4.4°C)	100°F (38°C)		
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)		

## **Dimensions**

All Models					
W x H x D (inches)	48 x 26 x 24				
WxHxD(mm)	1,219 x 660 x 610				

### **Specifications**

	Cond. Unit	<b>Ice Production</b> per 24hrs		<b>Water Usage</b> gallons per 100 lbs of Ice 90°F air/70°F water		<b>kWH Used</b> per 100 lbs				
Model Number		70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	of ice @ 90°F air/ 70°F water	<b>Voltage</b> Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
ICE1806W	Water	1,954 (888)	1,176 (534)	24.1	140	3.6	208-230/60/1	17.0	30	29,636
ICE1806R	Remote *	1,770 (805)	1,509 (686)	20.9	-	4.9	208-230/60/1	22.2	30	28,719
ICE1807W	Water	1,872 (851)	1,662 (755)	22.5	125	3.7	208-230/60/3	10.7	15	28,040
ICE1807R	Remote*	1,938 (881)	1,491 (678)	19.3	-	4.7	208-230/60/3	15.5	20	27,966

\*Requires Remote VRC 4061 Condenser

Number of Wires:

3 (including ground)
ICE1806W 310 (141) • ICE1806R 335 (151) • ICE1807W 310 (141) • ICE1807R 335 (151) Approx. Shipping Weight lbs (kg):

303. 371.3737 Phone: Fax: 303. 371.6296

Rev: Part: A-05/08

Enodis



